
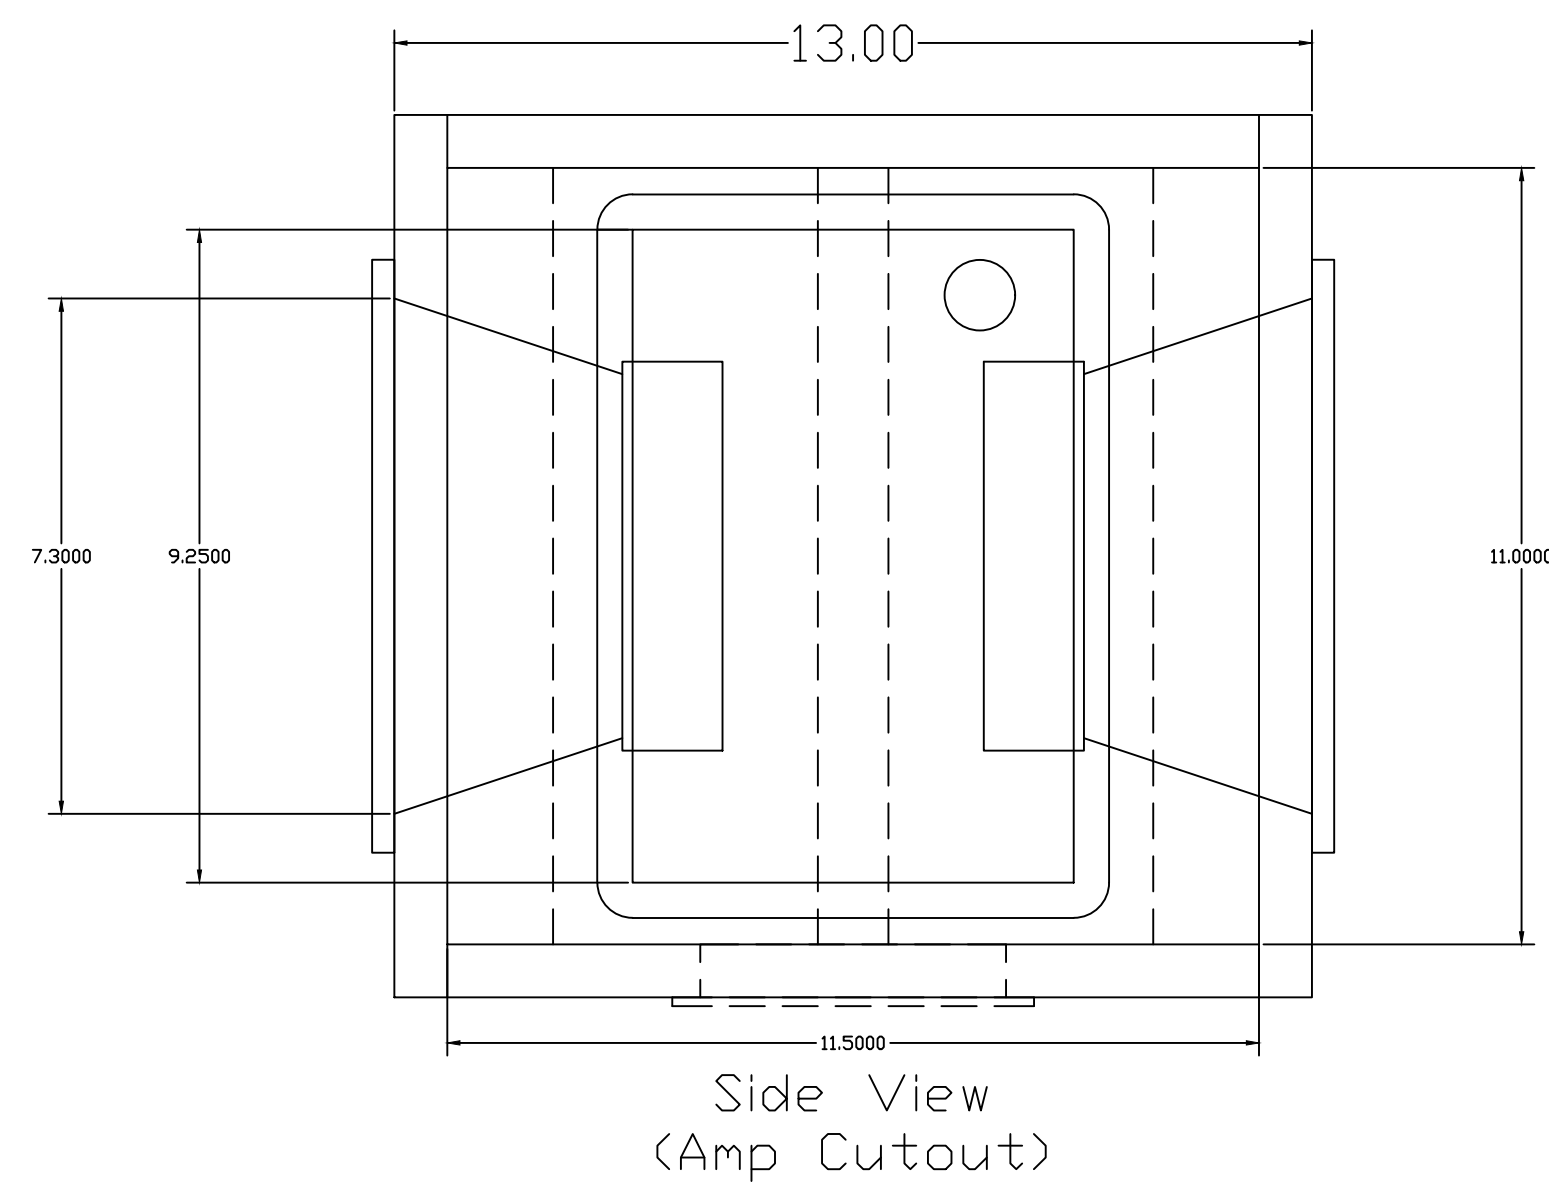


NOTES:

- Total volume with parts is 0.63 ft³
- 0.58 ft³ required for 0.707 Qcb sealed alignment
- (4) 1.5 x 1.5 x 11 hardwood corner blocks in vertical corners
- (8) 1.0 x 1.0 x 8.5 hardwood corner blocks Horiz. and along Amp cutout
- (4) 12.5 x 12.5 x 0.75 panels (front/back)
 - (4) 7.375 cutouts in front/back panels, centered
- (4) 11.5 x 12.5 x 0.75 panels (sides)
- (2) 6.25 x 9.25 cutouts for amps, centered.
- (4) 11.0 x 11.5 x 0.75 panels (top/bottom)
 - (2) 4.375" cutouts for AP vents centered in bottom

BRACE ENCLOSURE FOR NON-RESONANCE

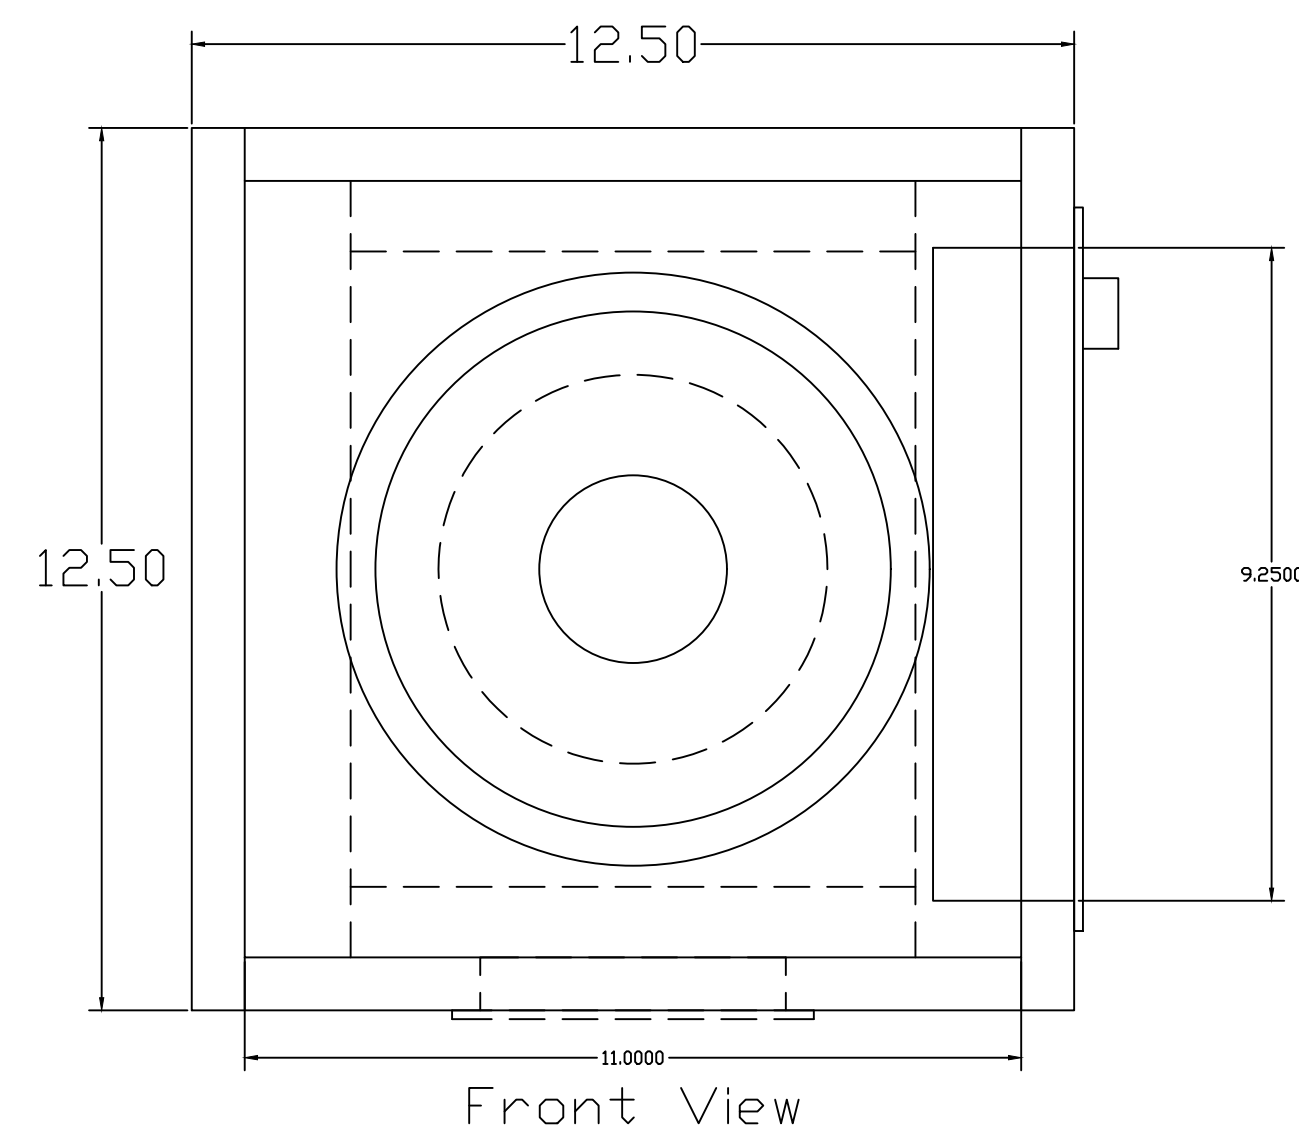

REV	DATE	MODIFICATIONS	BY
<div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>			FOR OTHER DRAWING OFFICE:
			SCALE: DRAWN TO SCALE
			DATE: 3/10/2025
			DRAWN BY: RHB
			CHECKED BY: RHB
DRAWING NO: 3000C-1			REV: 0
2XRSS210HQ-8 W/I AP VENT AND DSP AMP			